




ITEM NO.:59900

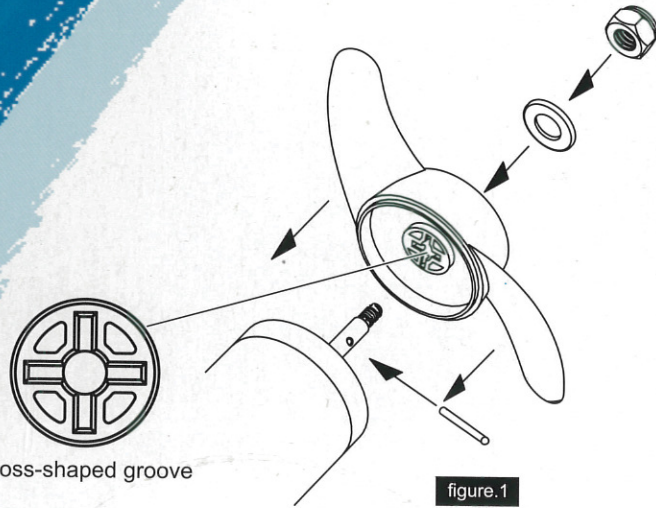

Cross-shaped groove

figure.1

Install the drive pin into the shaft hole and align it with the propeller (The drive pin and the propeller groove must align horizontally). Once the propeller is in place install the stainless washer and nut to the shaft. (figure.1)

NOTE

The cross-shaped groove (2 grooves) allow user to reassemble the propeller if one groove is worn off.

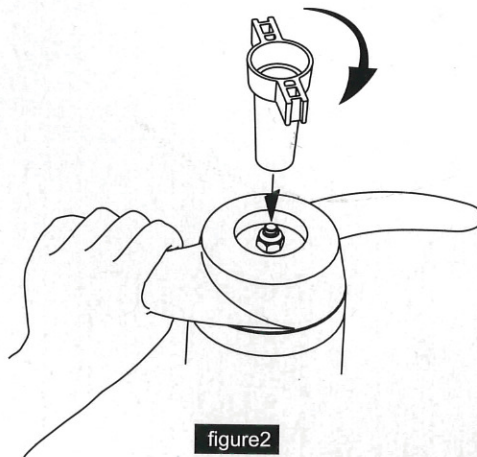


figure2

Hold the propeller to prevent it from revolving and use the propeller wrench to tighten the propeller nut. (figure.2)

CAUTION

Tighten the prop nut 1/4 turn past snug.(30 inch lbs.) over tightening the prop nut can damage to the prop.

2 Blade Propeller Replacement
CONTENTS:
2 BLADE PROPELLER
PROP NUTS & WASHERS
DRIVE PIN