


PERFORMANCE:

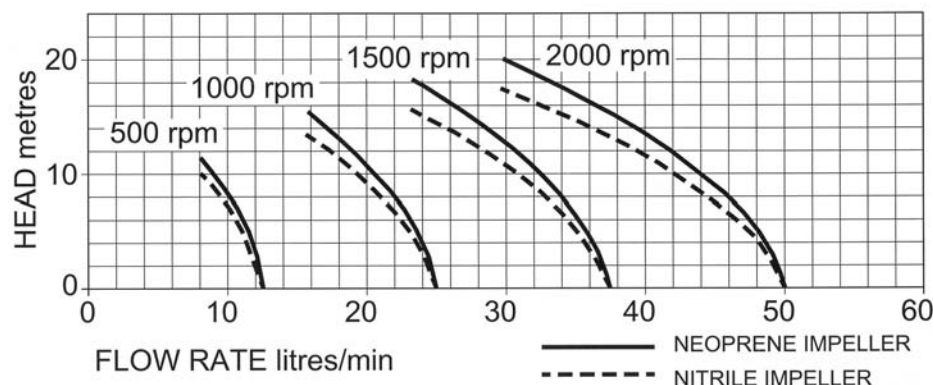


MODEL	Maximum flow rate		Maximum head	
	l/min	gall/min	metres	feet
10550-200	50	11	20	65
10550-212	50	11	17	55

Max power absorbed 550 watt at 2000rpm

DIMENSIONS:

WEIGHT: 3Kg

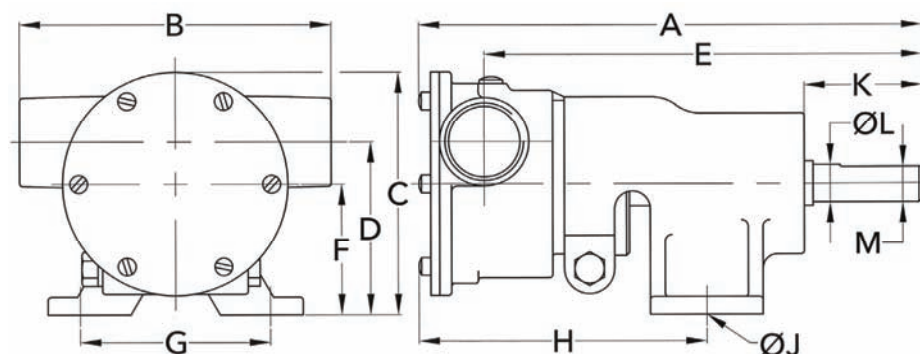

A	B	C	D	E	F	G	H	J	K	L	M
170	105	83	59	148	45	64	97	8.7	40	12.6	11.9

MATERIALS OF CONSTRUCTION:

Body	Bronze
Impeller	Neoprene or Nitrile
Wearplate	Replaceable
Shaft	Stainless steel type 316
Shaft seal	Lip type
Bearings	Twin single row, ball type
Port type	3/4" BSP to BS21 (DIN2999)

MODELS:

10550-200 Standard Neoprene impeller

10550-212 Oil resistant Nitrile impeller

10550-237 High pressure Neoprene



a xylem brand

BRONZE FLEXIBLE IMPELLER PEDESTAL PUMP 10550 SERIES



PUMP with 3/4" BSP PORTS

- * Constructed from marine quality bronze and stainless steel
- * Self-prime from dry up to 2.4m
- * Easy to service and maintain
- * Will tolerate abrasive wear
- * Handles hard and soft solids without clogging
- * Can pump in either direction
- * Will not airlock