


READ BEFORE INSTALLING

1 HOW TO MAKE THE FRONT PANEL REMOVABLE (OPTIONAL)


The front panel is semi-permanently attached during assembly. Please follow the procedure below to make the front panel removable.

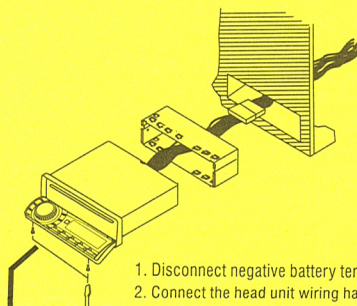

1. Disconnect negative battery terminal. Consult a qualified technician for instructions.
2. Connect the head unit wiring harness to your vehicle. Certain vehicles may require a wiring harness adapter (sold separately).
3. Re-connect battery, turn on the vehicle ignition.
4. Remove the trim ring. While holding the chassis, turn the unit on and press "OPEN" to allow the front panel to slide down.
5. Turn the chassis over to expose the bottom of the front panel mounting plate.
6. Locate and remove the 2 Phillips head #1 x 7/32" screws as indicated below.
7. Follow the front panel removal/attachment procedure as noted to the right.
8. Proceed with installation as outlined on page 2 of the owner's manual.

For questions, call our technical assistance hotline at 1-866-382-5476.

Remove the 2 screws shown below to make the front panel removable.

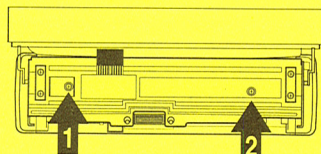

Front panel mounting plate (as seen from the bottom of the chassis).

2


ATTENTION! FRONT PANEL REMOVAL/ATTACHMENT PROCEDURE

Refer to making the front panel removable as noted to the left. Follow the procedure below when removing and attaching the front panel from the mounting plate.

Removing The Front Panel:

Turn the unit on and press "OPEN" to allow the front panel to slide down - as shown below.

1. Grasp the front panel and gently squeeze the release tab located at the bottom center backside of the front panel.
2. With equal pressure on both sides of the front panel, slide the front panel down and away from unit.
3. The mounting plate will automatically return to the closed position and the unit will turn off.

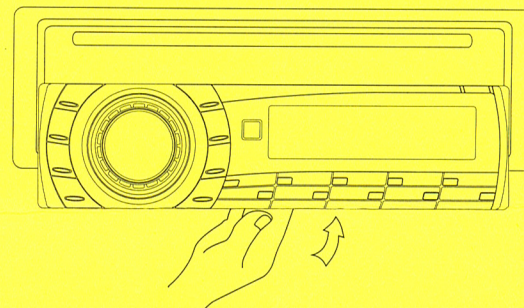

Attaching The Front Panel:

With the unit turned off and the mounting plate in the "closed" position:

1. Align and insert the left side of the front panel to the mounting plate as shown below.
2. While keeping the left side in position, press the right side of the front panel towards the mounting plate.
3. Press firmly until the front panel "clicks" into place.

