

PVC STEEL WIRE REINFORCED HOSE

- Used for drawing and conveying water, oil and powder in factory and agriculture
- Suitable for high strength working environment like suction and discharge for sand
- Good adaptability to hard weather condition and minus pressure, small bending radius, anti-abrasion
- Passed the ROHS, PAHS test
- Anti-UV



ANTI UV



TEM




ANTI ABRASION



ANTI CHEMICAL



SMOOTH

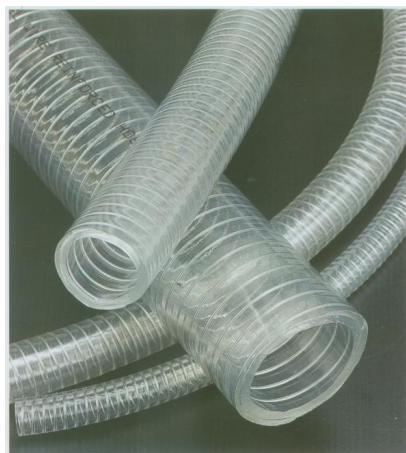

SIZE		MAX.W.P at 23°C	MAX.B.P at 23°C	WEIGHT	LENGTH
INCH	I.D.mm	O.D.mm	bar	g/m	m
1/4"	6	11	8	115	100
5/16"	8	14	8	150	100
3/8"	10	16	8	200	100
1/2"	12	18	8	220	50
5/8"	16	23	6	310	50
3/4"	19	26	6	400	50
1"	25	33	5	540	50
1-1/8"	28	36	5	595	40
1-1/4"	32	41	5	800	40
1-1/2"	38	48	5	1000	40
1-3/4"	45	56	5	1375	40
1-7/8"	48	59	5	1400	40
2"	51	62	5	1500	40
3"	76	90	4	3000	30
4"	102	116	4	4300	20