
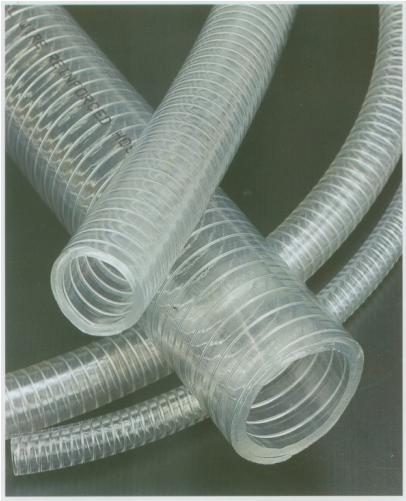


PVC STEEL WIRE REINFORCED HOSE-HIGH TEMP RESISTANCE

- Ideal for conveying hot liquids, oils, and powders in the food, sanitary, and chemical industries
- Used under 100°C condition, suitable for different high temperature environment
- Transient temperature: up to 160°C
- Maintains structural integrity under heat, preventing softening, expansion, and pressure loss
- Anti-abrasion

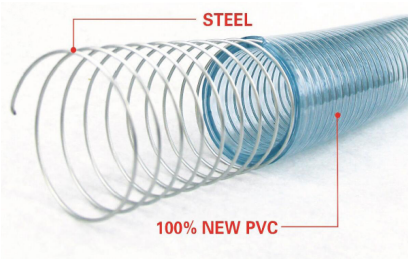

SIZE			MAX.W.P at 23°C	MAX.B.P at 23°C	WEIGHT	LENGTH
INCH	I.D.mm	O.D.mm	bar	bar	g/m	m
1/2"	12	18	8	24	220	50
3/4"	19	26	6	18	400	50
1"	25	33	5	15	540	50
1-1/8"	28	36	5	15	595	40
1-1/4"	32	41	5	15	800	40
1-1/2"	38	48	5	15	1000	40
1-3/4"	45	56	5	15	1375	40
2"	51	62	5	15	1500	40
3"	76	90	4	12	3000	30
4"	102	116	4	12	4300	20