


F-series \ specs

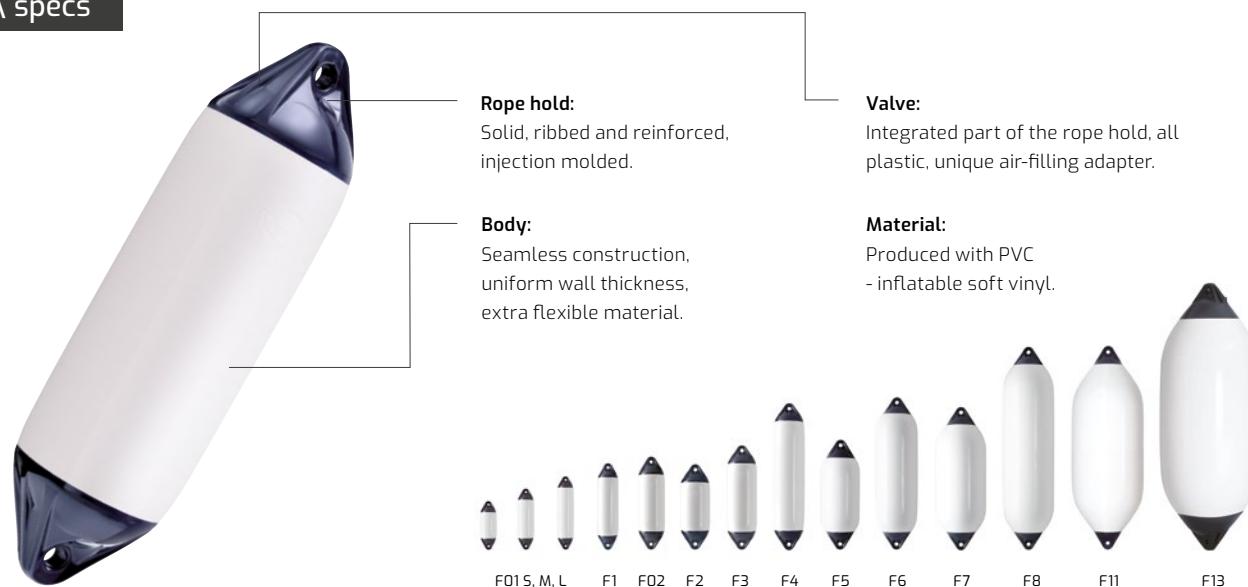

Article	Volume	Weight	Length	Diameter	Eye diameter
F01S	2.8	0.6	37.0	13.0	1.8
F01M	4.0	0.7	46.5	13.0	1.8
F01L	5.3	0.8	56.0	13.0	1.8
F1	8.0	1.0	61.0	15.0	2.2
F02	15.0	1.7	66.0	20.0	2.5
F2	16.0	1.8	61.0	22.0	2.8
F3	22.0	2.1	74.5	22.0	2.8
F4	35.0	2.9	104.0	22.0	2.8
F5	35.0	3.0	77.5	29.0	2.8
F6	60.0	4.2	109.0	29.0	2.8
F7	85.0	5.3	102.0	37.5	2.8
F8	135.0	7.6	144.0	37.5	2.8
F11	275.0	10.5	145.5	59.0	2.8
F13	700.0	23.0	188.0	75.0	4.0

Volume in liter / Weight in kg / Size in cm

Do not overinflate. Maximum 0.15 - 0.20 bar of pressure at 20° Celsius. Allowance +/-5%.

POLYMATIQ®

POLYFORM® F-series fenders are made by our unique, in-house developed and patented POLYMATIQ® technology that ensures supreme control over the fusion process and warrants for the most consistent quality available anywhere for such molded, soft Vinyl fenders.

Rope hold

People associate Polyform's inflatable buoys and fenders with the easily recognizable blue, rib-reinforced rope holds of the F-series. These are high pressure injection molded, solid right trough with reinforcing ribs.

Inflation valves

The Polyform inflatable soft vinyl buoys and fenders have inflation valves that is an integrated part of the rope hold through friction welding – there is no glue used.

The F-series fenders from size F01 to F11 are fitted with the V-10 valve. The F13 fenders are fitted with the larger V-40 valve. The F11 (and optional F8) is fitted with the Polyform® double valve system for more easily deflation.

Fender- and inflation guide


To choose the correct fender size for your boat, please refer to the Fender guide on page 68. Inflation instructions is stated on page 69.

Colours

Rope hold

Body

Standard:



On request:

